




17000 ATF Automatic Transmission Fluid Suffix A

Document version: 11 May 2024

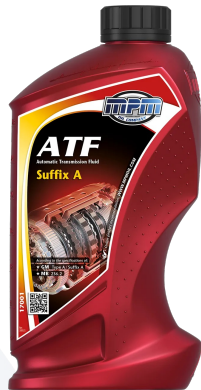

Description

This mineral ATF suffix A automatic transmission oil has been specially developed for semi-automatic transmissions, hydraulic systems, power steering, torque converters, machine tools etc. and other applications for which manufacturers specify an ATF-A oil.

According to the specifications of

GM type A / Suffix A
MB 236.2

Packaging units

| ART. NR. | VOLUME | ITEMS PER UNIT | ITEMS PER PALLET |
|----------|--------|----------------|------------------|
| 17001 | 1 L | 6 | 450 |
| 17020 | 20 L | 1 | 30 |
| 17060 | 60 L | 1 | 6 |
| 17205 | 205 L | 1 | 2 |
| 17999 | 1000 L | 1 | - |

Standard analyses

| TEST | VALUE | METHOD |
|------------------------------|-------------------------|--------|
| Density at 15°C | 0.878 kg/l | |
| Colour | yellowbrown_amber | |
| Viscosity | 10W | |
| Kinematic Viscosity at 40°C | 37 mm ² /s | |
| Kinematic Viscosity at 100°C | 7.12 mm ² /s | |
| Viscosity Index | 158 | |
| Flashpoint COC | 198 °C | |
| Pourpoint | -41 °C | |
| Total Base Number | 6.9 mgKOH/g | |
| Sulphated Ash | 1.6 mass% | |

These characteristics are typical of current production. Variations in these characteristics may occur.